
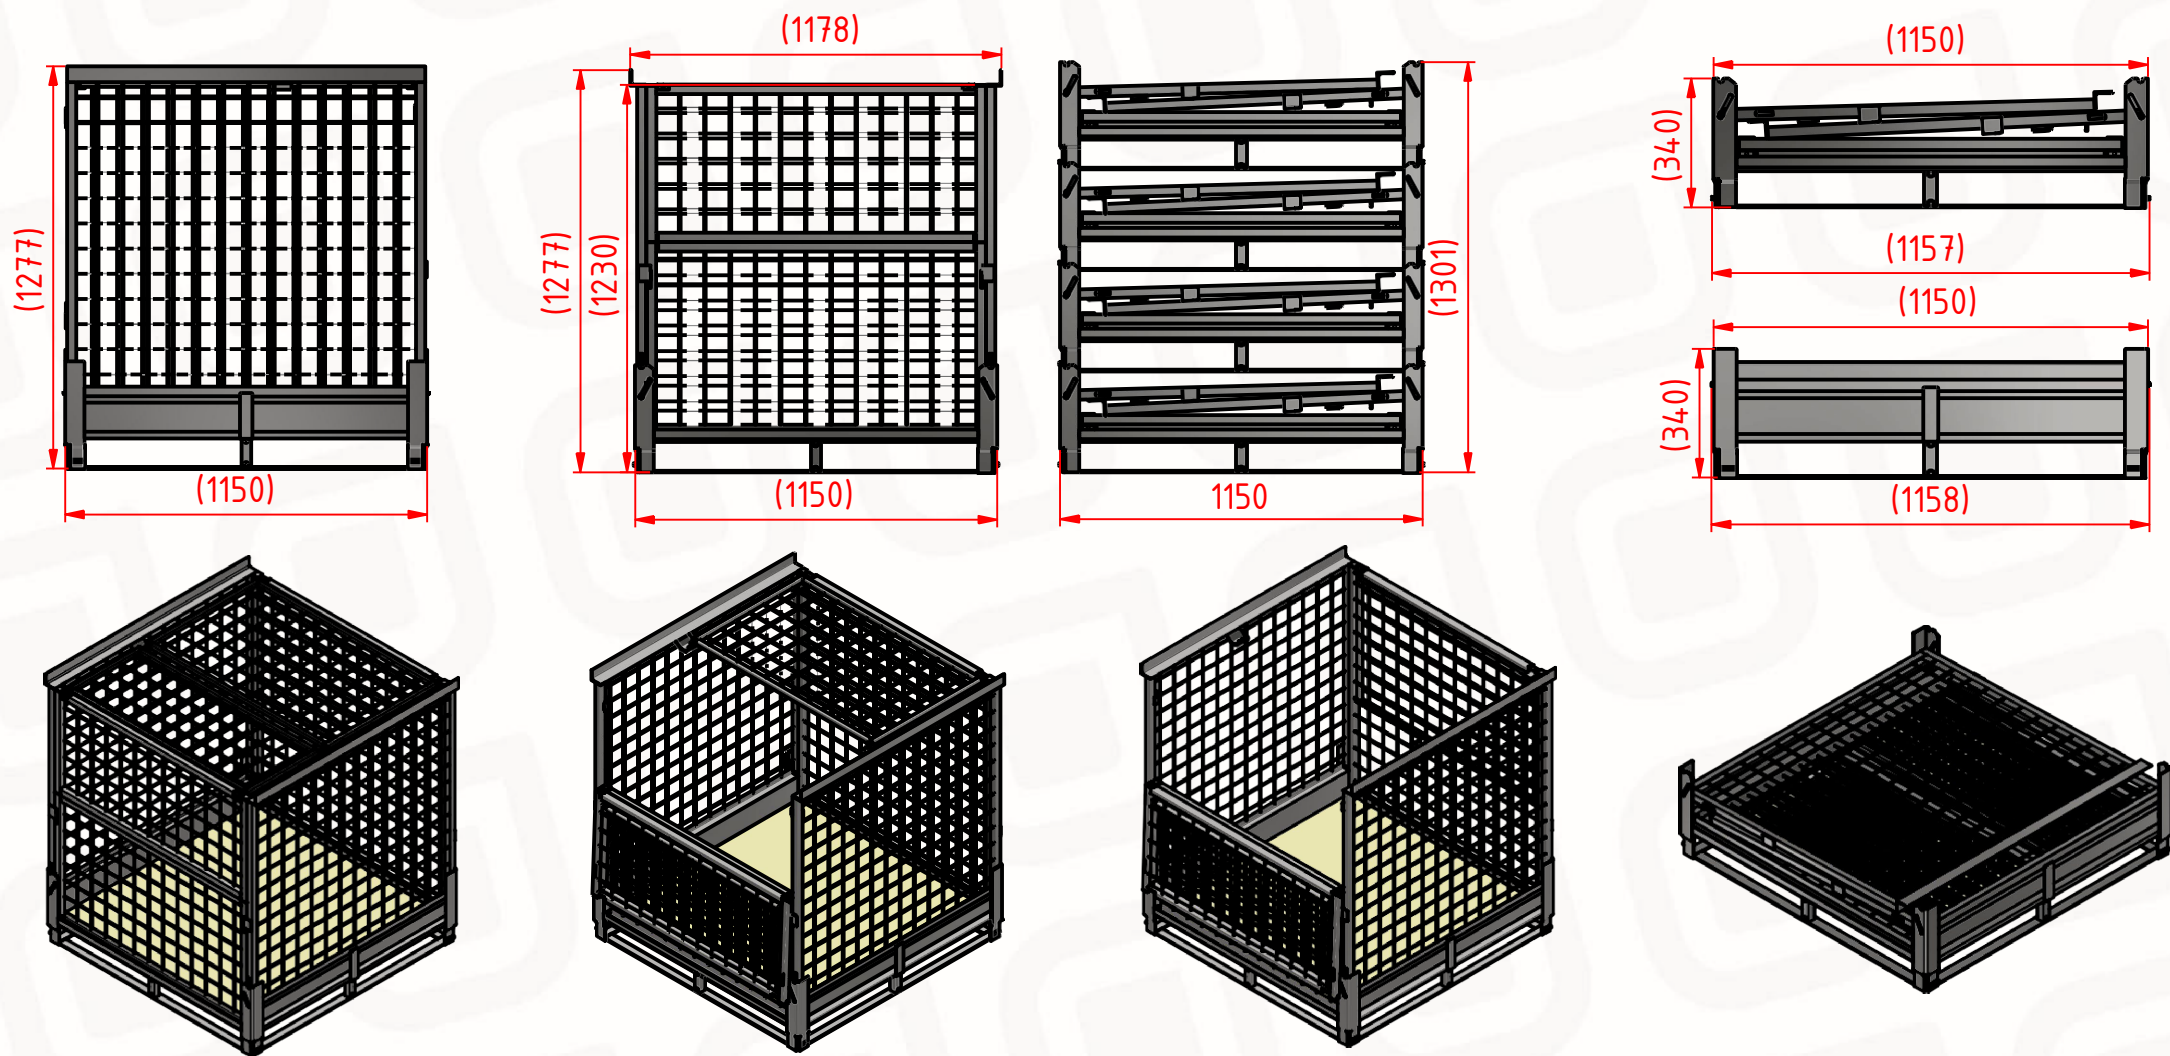
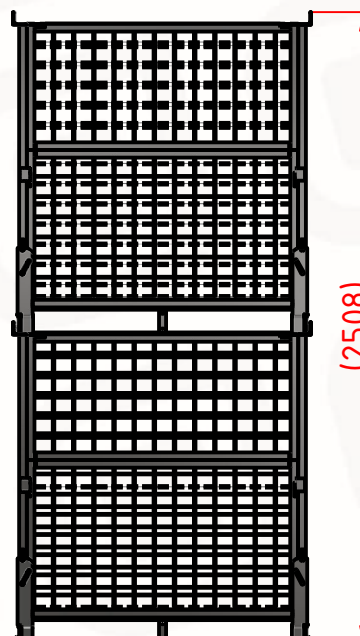


GITTERBOX 1300

TECHNICAL SPECIFICATION SHEET:

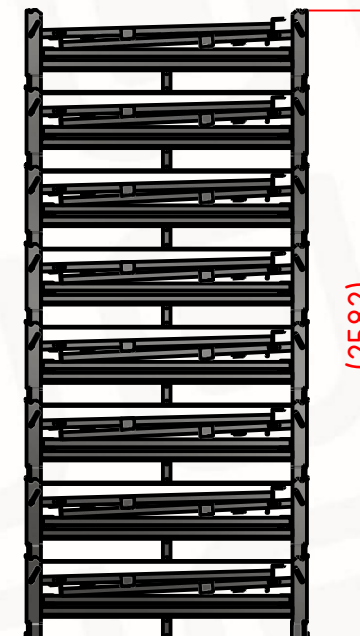

DESCRIPTION:		FOLDABLE GALVANIZED STEEL IBC WITH POLYPROPYLENE FOR DRY PRODUCT	
EXTERNAL DIMENSIONS:	(H1150xL1150xH1230mm)	MAX DYNAMIC FULL LOAD UNITS 2PCS WEIGHT: 3602 kg	MAX DYNAMIC FOLDED UNITS 6PCS HEIGHT: 2582 mm
INTERNAL DIMENSIONS:	(H1078xL1078xH1110mm)	MAX STATIC FULL LOAD UNITS 5PCS WEIGHT: 7500 kg	MAX STATIC FOLDED UNITS 12PCS HEIGHT: 3864 mm
FOLDING HEIGHT:	(340 mm)		
LID STACKING HEIGHT:	(1277 mm)		
EMPTY WEIGHT:	103 kg		
VOLUME:	1289 L		
LOAD CAPACITY:	1690 kg		
DYNAMIC LOAD:	3602 kg		
STATIC LOAD:	7500 kg		
RACKING LOAD:	3602 kg		
FOLDING RATIO	1:4		
STANDARD COLORS:	ZINC GRAY/GRAY	20 GP:	66 units
MATERIAL:	GALVANIZED STEEL + POLYPROPYLENE BASE BORD	40 GP:	140 units
WORKING TEMPERATURE:	-20+80°C	40 HC:	156 units
STANDARD TRAILER:	176 units	MEGA TRAILER:	198 units

DISCLAIMER:

**Capacity is dependent on the application and environment of use.
The suitability of application is to be consulted with Unipas.
Specifications subject to change without further notice.
All dimensions approximate.**

