
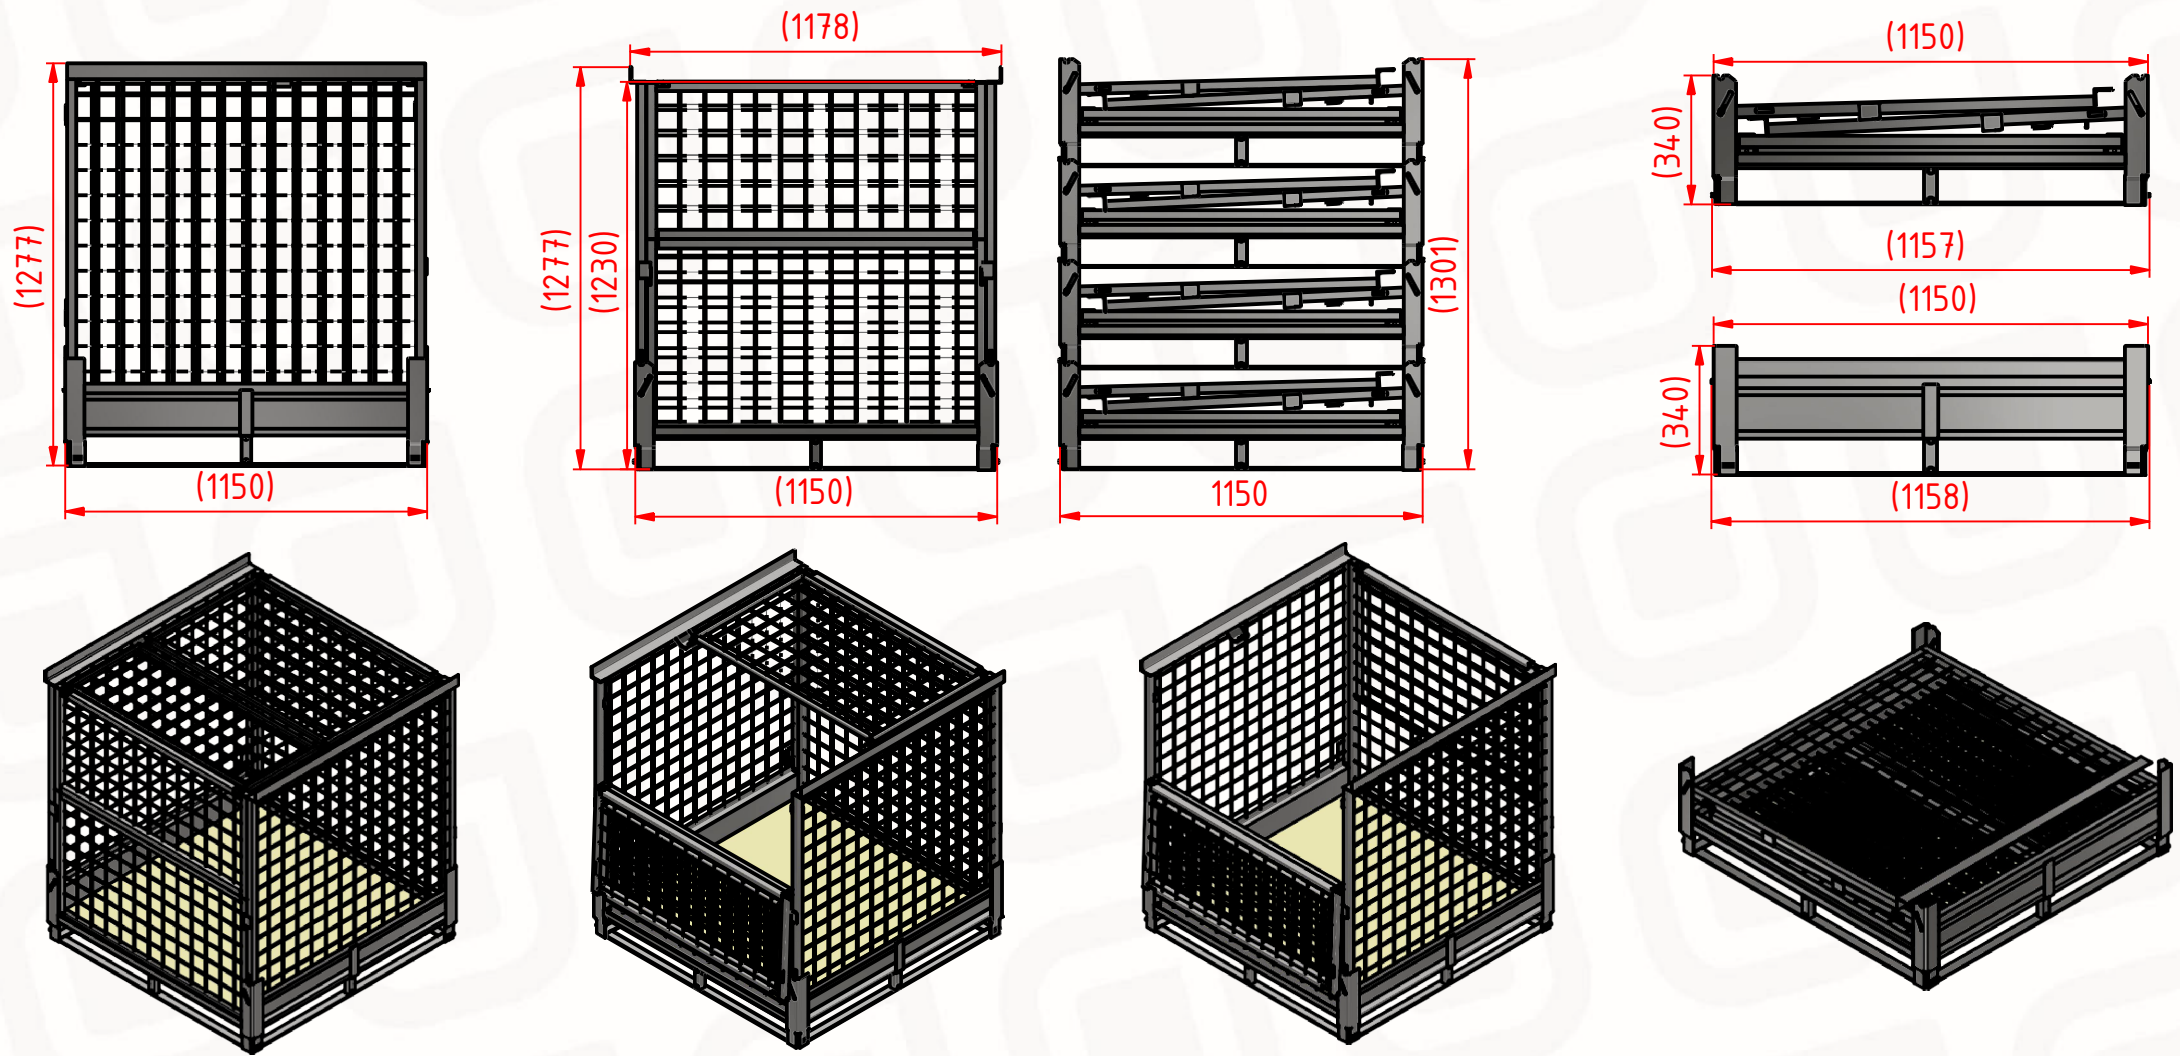
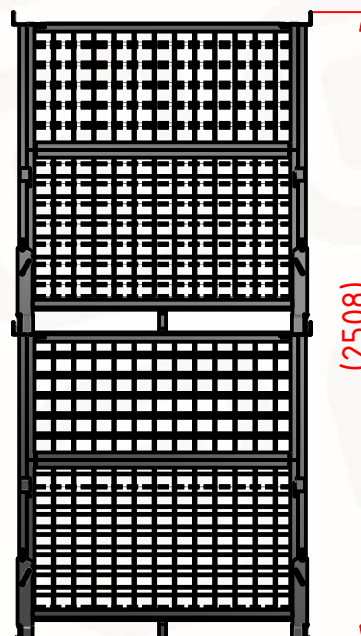


GITTERBOX 1300 L with LIDs

TECHNICAL SPECIFICATION SHEET:

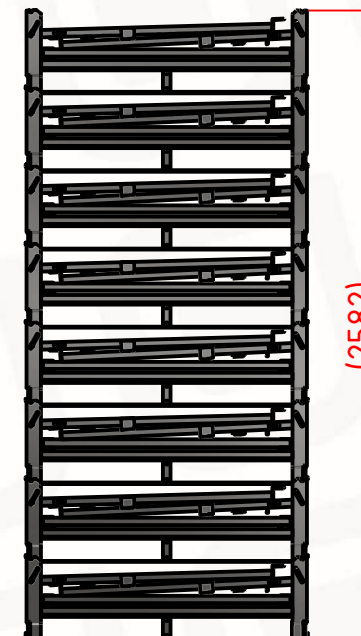

DESCRIPTION:		FOLDABLE GALVANIZED STEEL IBC WITH POLYPROPYLENE BASEBOARD FOR DRY PRODUCT	
EXTERNAL DIMENSIONS:	(H1150xL1150xH1230mm)	MAX DYNAMIC FULL LOAD UNITS 2PCS	MAX DYNAMIC FOLDED UNITS 6PCS
INTERNAL DIMENSIONS:	(H1078xL1078xH1110mm)	WEIGHT: 3202 kg	HEIGHT: 2582 mm
FOLDING HEIGHT:	(340 mm)	MAX STATIC FULL LOAD UNITS 4PCS	MAX STATIC FOLDED UNITS 12PCS
LID STACKING HEIGHT:	(1277 mm)	WEIGHT: 6404 kg	HEIGHT: 3864 mm
EMPTY WEIGHT:	111 kg		
VOLUME:	1280 L		
LOAD CAPACITY:	1490 kg		
DYNAMIC LOAD:	3202 kg		
STATIC LOAD:	6404 kg		
RACKING LOAD:	3202 kg		
FOLDING RATIO	1:4		
STANDARD COLORS:	ZINC GRAY/GRAY	20 GP:	66 units
MATERIAL:	GALVANIZED STEEL + POLYPROPYLENE BASE BORD	40 GP:	140 units
WORKING TEMPERATURE:	-20+80°C	40 HC:	156 units
STANDARD TRAILER:	176 units	MEGA TRAILER:	198 units

DISCLAIMER: Capacity is dependent on the application and environment of use.
 The suitability of application is to be consulted with Unipas.
 Specifications subject to change without further notice.
 All dimensions approximate.

