
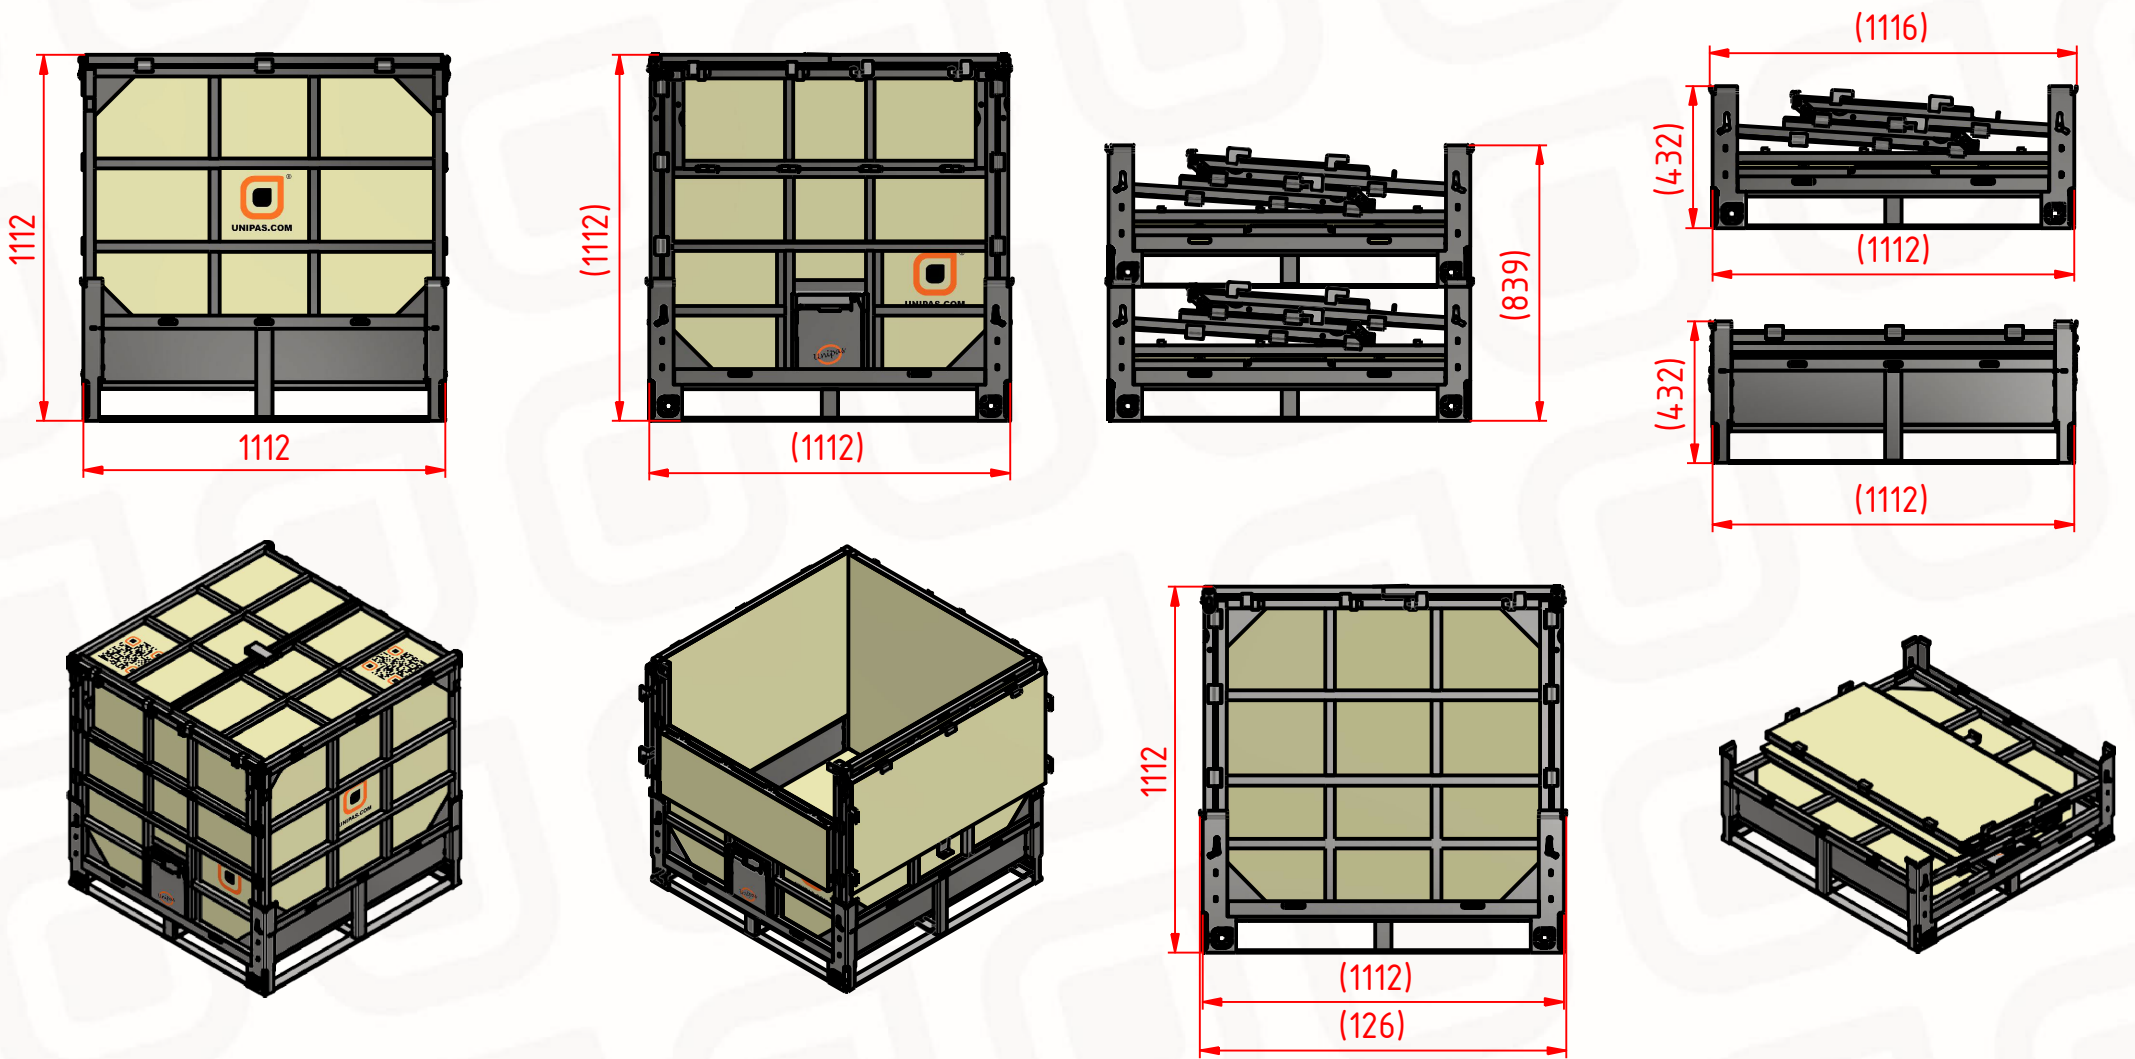
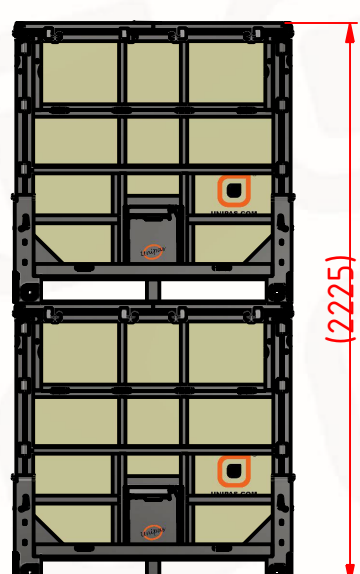


TECHNICAL SPECIFICATION SHEET:
UN


DESCRIPTION:		FOLDABLE GALVANIZED STEEL IBC WITH POLYPROPYLENE BOARDS FOR LIQUID MATERIAL	
EXTERNAL DIMENSIONS:	(W1112xL1112xH1112mm)	MAX DYNAMIC FULL LOAD UNITS 2PCS	MAX DYNAMIC FOLDED UNITS 6PCS
INTERNAL DIMENSIONS:	(W1035xL1035xH956mm)	WEIGHT: 3344 kg	HEIGHT: 2467 mm
FOLDING HEIGHT:	(432mm)	MAX STATIC FULL LOAD UNITS 5PCS	MAX STATIC FOLDED UNITS 12PCS
LID STACKING HEIGHT:	(W1112mm)	WEIGHT: 8360 kg	HEIGHT: 4910 mm
EMPTY WEIGHT:	172 kg		
VOLUME:	1021 L		
LOAD CAPACITY:	1600 kg		
DYNAMIC LOAD:	3344 kg		
STATIC LOAD:	8360 kg		
RACKING LOAD:	3344 kg		
FOLDING RATIO	1:2,5		
STANDARD COLORS:	ZINC GRAY/GRAY	20 GP:	48 units
MATERIAL:	GALVANIZED STEEL+POLYPROPYLENE	40 GP:	120 units
WORKING TEMPERATURE:	-25+60°C	40 HC:	120 units
STANDARD TRAILER:	-	MEGA TRAILER:	-

DISCLAIMER: Capacity is dependent on the application and environment of use.
 The suitability of application is to be consulted with Unipas.
 Specifications subject to change without further notice.
 All dimensions approximate.

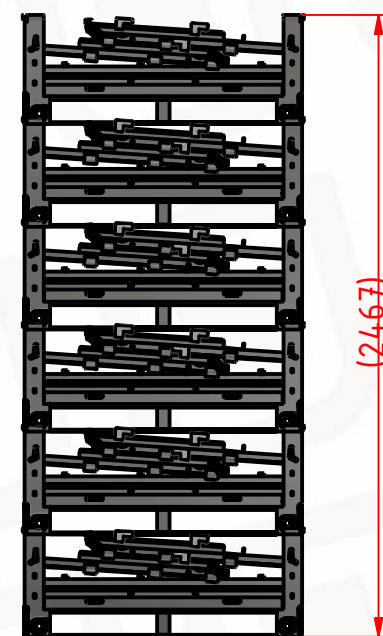